

VIN:	XXXXXXX	Vehicle:	X'E84/OFF-ROAD VEHICLE/X1 28iX/N20/AUTO/USA/LL/2013/12
System Version:	3.48.20.13322	Data Version:	R3.48.20.13322

51 45 266 Removing and installing/replacing
instrument panel trim on right



Special tools required:


- [00 9 325](#)



Important!

Risk of damage!

When working on trim panel components, make sure that the sensitive surfaces are not scratched or damaged.

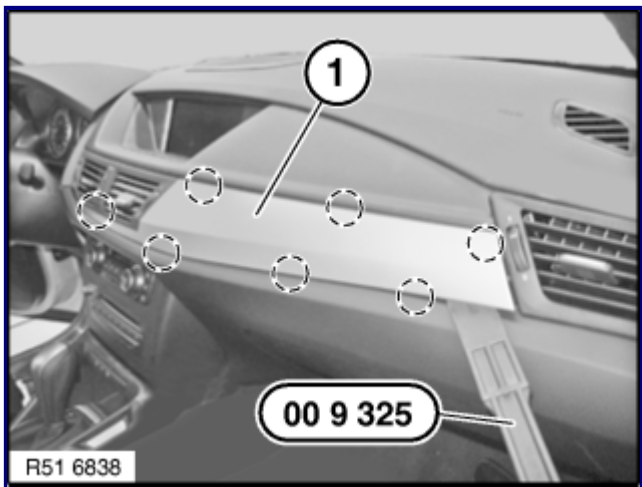

Lever out the cover (1) on the marked points with special tool [00 9 325](#).

Disconnect plug connection and remove cover (1).

Installation:

Renew faulty retaining clips.

Replacement

[Modify centre fresh air grille.](#)

Modify retaining clip.

