



VIN:	XXXXXXX	Vehicle:	X'E84/OFF-ROAD VEHICLE/X1 28i/N20/AUTO/USA/LL/2015/02
System Version:	3.48.20.13322	Data Version:	R3.48.20.13322

51 49 000

Removing and installing or replacing trim  
for tailgate

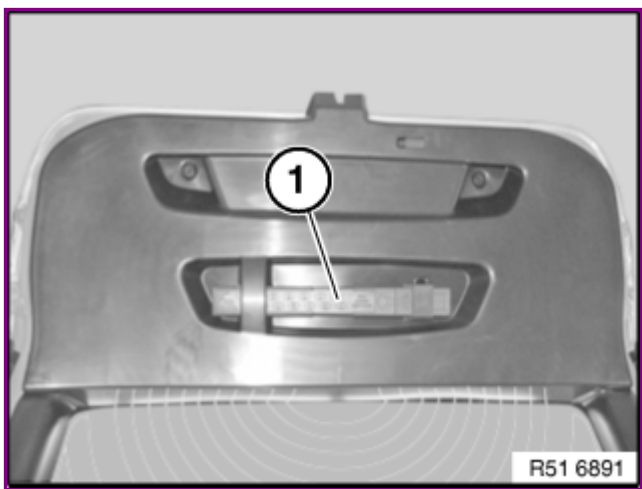

Remove warning triangle (1).

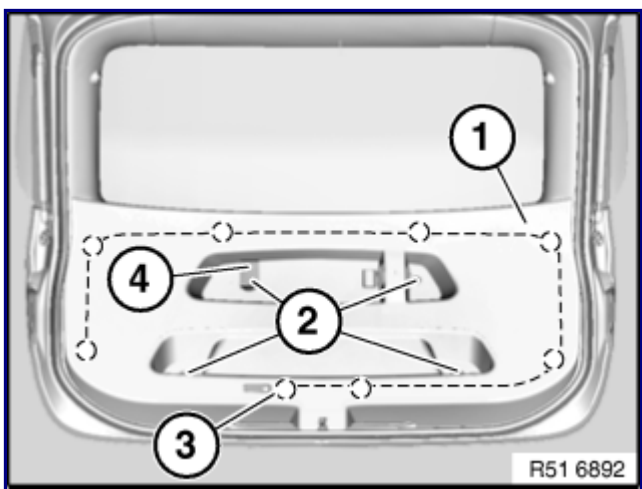

- Release screw (2) from warning triangle holder (4).
- Remove warning triangle holder (4).
- Release remaining bolts (2).
- Use appropriate tool to unclip trim panel (see highlighted area) from tailgate (1).
- US version only
  - Feed out tailgate lock with emergency release (3).
- Remove panel for tailgate (1).

- Installation:*
- Replace faulty clips (1).
  - Insert trim of tailgate properly.
  - US version only
    - Properly feed through emergency release of tailgate lock.
- Replacement**
- Modify clips (1).

